


Intelli Proof 213 *excellence*

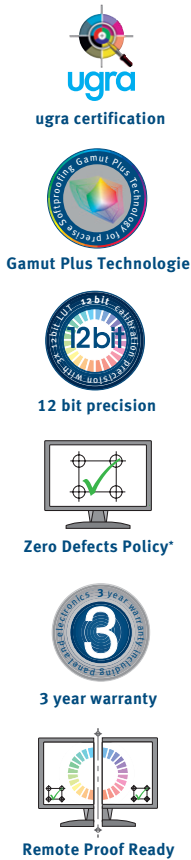

no defects in a A5 landscape center, max 2 in the remaining area

**PUBLISHING
PRAXIS 7-8/07**

A perfectly balanced display with a color reproduction that - due to the large gamut - allows to judge even critical colors.

Wide Gamut proof display with 12 bit hardware calibration

Quato Intelli Proof excellence TFT-display

The Intelli Proof excellence is perfectly suited for all graphic professionals and photographers which demand a wide color gamut and an optimal calibration precision. The integrated direct USB-hardware calibration adjusts whitepoint, gamma and luminance with up to 36 bit precision, based on 48 bit numerics. The user friendly iColor Display software is easy to use and makes the complete calibration process a snap. The sophisticated software and hardware - combined with the 30 bit color output - ensures highly precise soft proofs and smooth gradients. The integrated ugra certification shows a 100% congruency to the ISOcoated reference and recommends the display also for Multicolor and HighBody printing. The Intelli Proof excellence is the perfect tool for reproducing a variety of output devices in Prepress, Design and Photography. Due to the high precision of the ISOcoated simulation, the Intelli Proof excellence creates outstanding softproofs.

- › wide color gamut with 30 bit internal and external color
- › 36 bit internal precision with 48 bit software precision
- › direct USB-control of the 3x 12bit LUT and the luminance inside the monitor
- › up to 200 cd/qm luminance, contrast 550:1
- › iColor Display 2 calibration software and hood included
- › precise 4 - channel colorimeter optional available
- › ugra display analysis and certification integrated into the Software
- › reference mode for exact monitor to monitor matching

Features

Precise adjustments

The Quato iColor Display Software adjusts the Intelli Proof's internal calibration processing unit with up to 36 bit resolution. Instead of up to 256 steps with a software calibration, this solution uses up to 4.096 steps to optimize the display. Additionally the monitor is able to show 1024 gray or billions of colors by using a frame modulation technology. Due to the large gamut, the Intelli Proof excellence is able to nearly reproduce the full gamut based on the specs of the ISO 12647 regulation.


Software

iColor Display not only adjusts the monitor automatically, it also sports many professional features: the calibration results can be verified by either Quato's internal certification, the ugra-DACT standard or according to SWOP. That allows an objective judgement of the displays's performance - including the certification for softproofing. A unique calibration restore function is also available. The gamut projection with a/b diagramm - in comparison to the offset printing reference ISOcoated - is included, too.

Picture quality

Thanks to the pure digital DVI-connection, the Intelli Proof's display performance is always perfect. Crisp images, high contrasts and smooth gradients are now available on the desktop. The dual domain S-IPS Panel combines a 1600 by 1200 pixel resolution with 30 bit output and high viewing angles. It allows to show an A4 landscape page plus palettes on one monitor. The Intelli Proof 213 is therefore the ideal monitor for every large format and color confident working environment.

Display and gamut

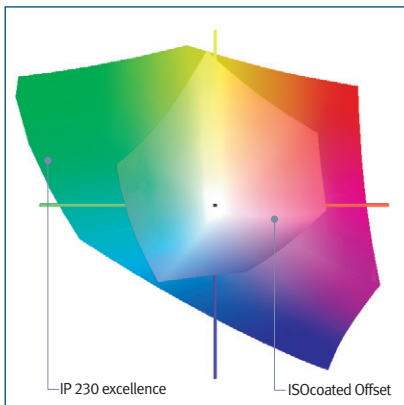

Absolute colorimetric gamut projection

The absolute colorimetric projection shows the perfect match between the display's gamut and the offset reference.



UGRA Display Analysis and Certification Tool (DACT)

The integrated UGRA DACT enables the user to analyse and certify the monitor according to the specifications of the UGRA for proof displays.



Precise color calibration

The optimal partner for the combination of Intelli Proof monitor and iColor Display 2 software is the precise Silver Haze Pro colorimeter (optional).

Specifications

Panel type

Wide Gamut Dual-Domain S-IPS

Panel size, speed, viewing angle

21.3" - 54cm, 25ms
170° horizontal / vertical

Contrast and brightness

550:1, 200cd/m² (typical)

Native resolution and colors

1600 x 1200 Pixel @ 30bit (Frame-Modulation)

Frequencies

Horizontal 30- 92kHz, vertical 50 - 85Hz

Connection

1x digital DVI-D, 1x VGA, USB-port for calibration, internal USB-Hub 1up/2down (bus powered), VESA-mount

Ergonomics

Swivel: -90° bis +90°
Tilt: -5° bis +35°
Height adjustment: 0-6 cm
Portrait function (with selected graphics cards)

Operating systems

Mac OS 9.2.2 and Mac OS X (Intel/PPC)
Windows 2000, XP

Pixel error policy

ISO 13406-II
no defects in the screen center

Waranty

36 month (EC only)

Dimensions and weight

480 mm x 520 mm x 220 mm (w/o hood)
11kg (w/o hood)

Power consumption

Max. 60 watts in use, 3 Watt (off)

EMI-certifications

TCO 95, TÜV-type approved, FCC, CE, UL

Calibration

Automatic USB-hardware calibration with 3x 12 bit Look-Up Table and luminance (backlight brightness) inside the monitor, ugra display certification built-in

Software

automatic hardware calibration, RGB-curve adjustments, LUT- or Matrix/TRC-profile, DeltaE (LAB) certification of the profile, check if the profile is valid, a/b gamut projection in comparison to ISOcoated offset printing reference, SWOP® certification built-in

Measurement device

Optional 4-channel Silver Haze Pro colorimeter

Supported measurement devices

Gretag Macbeth Eye-One Pro series,
Silver Haze Pro colorimeter, X-Rite DTP-94,
Monaco Optix (XR)

Part number

080212 Intelli Proof 213 excellence Pro
Monitor, software, hood, sensor

Intelli Proof 213 excellence Basic
Monitor, software, hood



Specifications are subject to change without notice