




HP Everyday Adhesive Matte Polypropylene, 3-in Core



The HP large format printing system—the complete solution

HP Designjet, HP Latex, and HP Scitex Printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

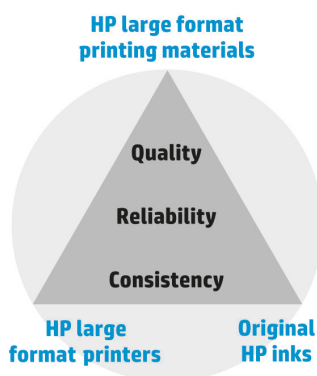

High-quality prints for your day-to-day production

Produce eye-catching displays

See outstanding image quality. Work with the wide color gamut and smooth transitions delivered by this matte polypropylene material and produce quality prints from line drawings to photo-quality POP displays.

Gain efficiency

Help keep your production process moving smoothly. This easy-to-use film features a permanent self adhesive for secure, reliable mounting.

Make the versatility of this material work for you

ICC profiles help you get the right color, right away. Take advantage of compatibility with Original HP Latex, dye, and pigmented inks on this versatile, easy-to-use printing material.

Target customers	Applications	Benefits
Print service providers	POP and retail displays	Outstanding image quality for day-to-day production
Retail store in-house printing	Trade show and event displays	A permanent self-adhesive for secure, reliable mounting
Event designers	Temporary exhibitions	
Advertising agencies	Architecture competitions	
Geographic Information Systems (GIS)		
Government (printing self-adhesive maps)		

Technical specifications



HP Everyday Adhesive Matte Polypropylene, 3-in Core

For the latest ICC profiles/paper presets, please visit HPLFMedia.com/hp/paperpresets.

Weight (base film)	95 g/m ² per ISO 536 Test Method			
Weight (with liner)	168 g/m ² per ISO 536 Test Method			
Thickness (base film)	160 microns/6.3 mil per ISO 534 Test Method			
Thickness (with liner)	215 microns/8.5 mil per ISO 534 Test Method			
Opacity (with liner)	Greater than 96% per TAPPI T-425 and ISO 2471 Test Methods			
Brightness (with liner)	101% per ISO 2470 Test Method			
Whiteness (without liner)	Greater than 120 per ISO 11476 Test Method			
Whiteness (with liner)	150 per ISO 11475 Test Method			
Finish	Matte			
Operating temperature	15 to 35° C / 59 to 95° F			
Operating humidity	20 to 80% RH			
Dry time	Less than 2 minutes (at 23° C, 50% RH)			
Lamination	Yes			
Shelf life	2 years, unopened in original packaging			
Storage temperature	15 to 35° C / 59 to 95° F			
Storage humidity	15 to 30% RH			
Country of origin	Product of China			
Ordering information	Product numbers	Roll sizes	UPC codes	Region
	D9R24A	914 mm x 30,5 m (36 in x 100 ft)	848412009798	United States, Canada, Latin America, Europe, Middle East, and Africa
	D9R25A	1067 mm x 30,5 m (42 in x 100 ft)	848412009804	United States, Canada, Latin America, Europe, Middle East, and Africa
	D9R26A	1270 mm x 30,5 m (50 in x 100 ft)	848412009811	United States, Canada, Latin America, Europe, Middle East, and Africa
	D9R27A	1524 mm x 30,5 m (60 in x 100 ft)	848412009828	United States, Canada, and Latin America
Warranty	HP large format printing materials are free from defects in materials and workmanship. For warranty statement, please see HPLFMedia.com/hp/MediaWarranties . To obtain warranty service, please contact Brand Management Group customer support at HPLFMedia.com/hp/en/contactus .			

For detailed information on the HP large format printing materials portfolio and to order, visit HPLFMedia.com

© 2020 HP Development Company, L.P. © 2020 Brand Management Group. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP and BMG shall not be liable for technical or editorial errors or omissions contained herein.

HP is a registered trademark of HP Development Company, L.P. and is used by Brand Management Group on license from HP Development Company, L.P.

